

 SoliTek  
**SOLID**  
series

**Solrif**  
Transparent

 290 W

 Made in the EU

3,2+3,2 mm glass



Fire class A



10 500 Pa

Extreme load  
resistance



Ammonia  
resistance



50 mm

Hail resistance  
class 5



98 %

98 %  
recyclable



35 %

35% of recycled  
glass content

**30**  
YEAR

Product &  
Efficiency  
Guarantee

**90%**  
POWER WARRANTY



THE FIRST AND ONLY  
IN THE WORLD

Deutsches  
Institut  
für  
Bautechnik

**DIBt**

ONE OF A FEW IN THE WORLD

## Electrical data (STC\*)

Maximum power (W)	290
Cell technology	N type, TOPCon - bifacial
Open circuit voltage ( $V_{oc}/V$ )	27,93
Short circuit current ( $I_{sc}/A$ )	13,80
Max power voltage ( $V_{mpp}/V$ )	21,97
Max power current ( $I_{mpp}/A$ )	13,20
Module efficiency ( $\eta$ )	14,69 %
Max system voltage (V)	1500
Max current (A)	25
Power tolerance	0/+5W

\*Under standard test conditions (STC) of irradiance of 1000W/sq.m., spectrum AM1.5 and cell temperature of 25°C. Flash testing measurement accuracy of +/-5%.

## Warranty


30 years product warranty

30 years efficiency warranty

First year degradation (%) 1

Annual degradation (%) 0,31

Power in year 30 (%) 90

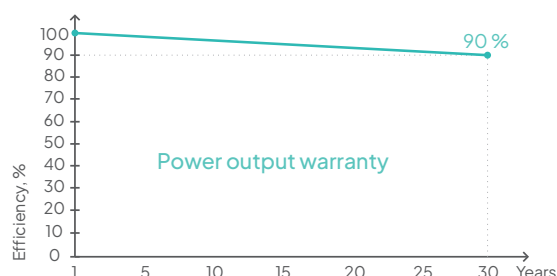

## Certifications

IEC 61215:2021; IEC 61730:2023

Cradle to Cradle (C2C)	Gold level
abZ/aBG	National technical approval / General construction technique permit
EN 13501-5	Broof (t1)
IEC 62716:2013	Ammonia corrosion testing
IEC 61701:2020	Salt mist corrosion testing
IEC 61215-2:2021	50 mm hailstone - Hail resistance class 5 (HW5)
ISO 9001:2015	Quality management systems
ISO 14001:2015	Environmental management systems
ISO 45001:2018	Occupational health and safety
SundaHus	A level assessment

Produced using 100% renewable energy

Membership at Svensk Solenergi



Product assessed in SundaHus Material Data



PRODUCED USING 100% RENEWABLE ENERGY



Svensk Solenergi




## Temperature ratings

Current temperature coefficient ( $\alpha$ )	+0,045% / °C
Voltage temperature coefficient ( $\beta$ )	-0,250% / °C
Power temperature coefficient ( $\delta$ )	-0,300% / °C
Nominal operating module temperature	46 °C

## Mechanical data

Dimensions (LxWxH) (mm)	1767x1160x20
Grid dimensions (LxW) (mm)	1749x1128
Weight (kg)	33,5
Front glass (mm)	3,2 structured, low reflection, with AR coating, TVG
Back glass (mm)	3,2, transparent, TVG
Cell Size (mm)	182x91,875
Busbars	10
Cell configuration	4x18
Frame	Solrif D
Rated operating altitude (m)	Up to 2000
Operating temperature (°C)	-40 ÷ +85
Maximum test load (wind/snow) (Pa)	3600/10500
Junction box / IP class	Split junction box / IP68
Cable cross section size (mm <sup>2</sup> )	4
Cable length (m)	1,2
Bypass diodes	3
Connector	MC4-EVO2

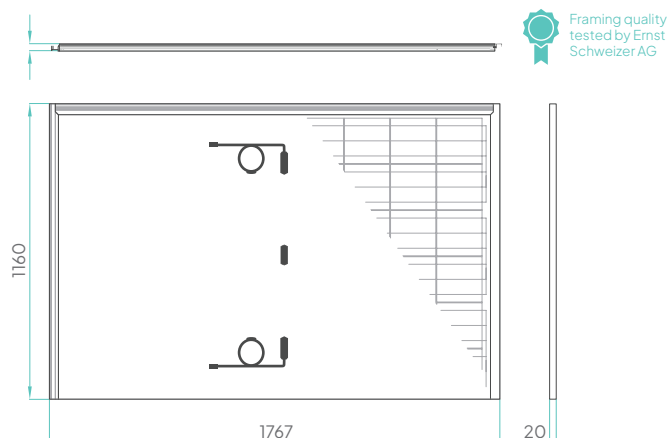

## Packing information

Modules per pallet (pcs)	25
Dimensions of a pallet (LxWxH) (mm)	1815x1205x1070
Weight of a pallet (gross) (kg)	901
Pallets per 13,6 m truck (pcs)	14
Modules per 13,6 m truck (pcs)	350

